

## HBZ Series

Submersible Pumps | Dewatering Submersibles



### Application

- Civil engineering
- Mines, quarries, Coal ore & slurries
- Sewage treatment plants
- General pumping purposes

### Pump

- Max. liquid temperature: +40°C
- Flow: up to 105m<sup>3</sup>/h
- Head: up to 56m
- Power: 5.5kW (2 HP) to 15kW (20 HP)
- Max. Immersion depth: 25m
- 20m cable length

### Motor



- Copper winding
- Insulation class: B
- Protection class: IP68



### Technical Data

Model	Discharge (mm)	Power		Max. HEAD (m)	Max Flow (m <sup>3</sup> /h)	Max Solid Dia
		kW	HP			
HBZ100.55.3	100	5.5	7.5	23	105	8.5
HBZ100.75.3	100	7.5	10	40	84	11.5
HBZ100.110.3	100	11	15	48.5	84	11.5
HBZ100.150.3	100	15	20	56	84	11.5

### Performance

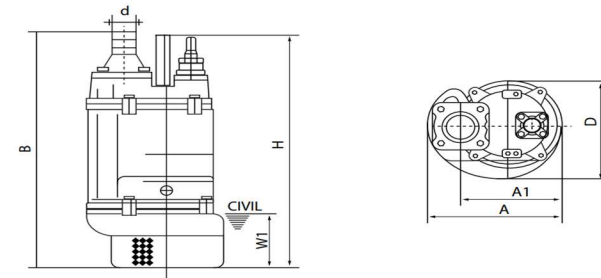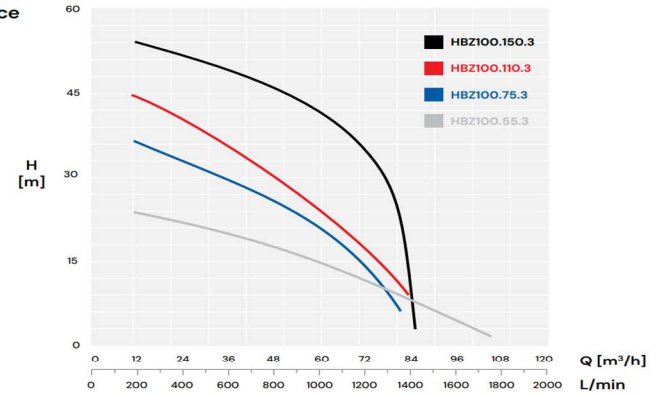

### Dimensions

Model	d	A	A1	B	D	H	W1
HBZ100.55.3	100	306	218	686	259	598	150
HBZ100.75.3	100	330	240	764	314	676	190
HBZ100.110.3	100	373	255	807	350	695	190
HBZ100.150.3	150	330	240	790	314	676	190

## Commercial Plumbing & Fire Supplies

### Site Address

6A Kelly Court,  
Springvale, VIC 3171

### Postal Address

6A Kelly Court,  
Springvale, VIC 3171

### Contact Details

P: 03 9791 7500  
E: sale@cpfs.net.au

