

HSM Series

Water Supply & Pressure Pumps
Submersible Pressure Pumps




Application

The Hyjet multistage submersible pump has an in-built pressure controller, making it easy to install into your underground or above ground tanks, utilising rainwater for your household and garden needs. Low level float switch cut out for extra run dry protection.

Features

- Fully automatic pressure system
- Run dry protection
- In-built electronic controls
- Automatic reset
- Quiet operation
- Thermal overload protection
- Automatic float switch for low level cut out


Performance

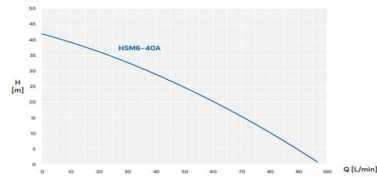

Technical Data

Model	Volts	Power (kW)	Amps (A)	Max. FLOW (L/min)	Max. HEAD (m)	Outlet (mm)	Cable (m)
HSM6-40A	240	1	4.2	93.2	42	25	10

HSM6-40A



Construction

- Impeller: Technopolymer
- Pump Casing: Stainless steel AISI 304 / Technopolymer
- Motor Shaft: Stainless steel AISI 304
- Double mechanical seal: Silicon carbide - graphite / ceramic - graphite
- Motor: IP68
- Depth of immersion: 12m
- Electric power cable: HO7RN 10m with 3 pin plug
- Class: F
- Liquid Temperature: 35°C

Dimensions

Model	H (mm)	W (mm)	G.W (kg)
HSM6-40A	520	130	8.5

HSM Series

Water Supply & Pressure Pumps
Submersible Pressure Pumps



Application

- Household water supply & irrigation
- Submersible installation
- Water transfer
- Pressure boosting
- Industrial wash down

Features

- Fully automatic pressure system
- Run dry protection
- In-built electronic controls
- Automatic reset
- Quiet operation


Construction

- Pump casing: Stainless steel AISI 304
- Motor shaft: Stainless steel AISI 304
- Impellers: Technopolymer
- Diffuser: Technopolymer
- Double mechanical seal: silicon carbide - graphite / ceramic - graphite
- Motor IP68
- Cooled motor (by water) of Class F and thermal protection
- Electric power cable HO7RN 5m with 3 pin

Technical Data

Model	Power (kW)	Power (HP)	Max. FLOW (L/min)	Max. HEAD (m)	Cable (m)	Impellers	Outlet (mm)	Voltage (V)
HSM1100-PC	1.1	1.5	98	56	10	8	25	220-240


HSM1100-PC



Dimensions

Model	H (mm)	D (mm)	B	DN	G.W (kg)
HSM1100-PC	950	100	125	25F	14

Performance

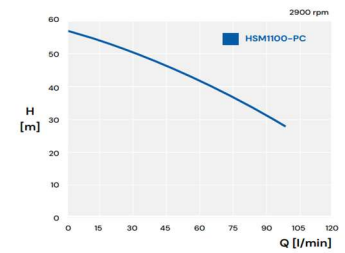

Commercial Plumbing & Fire Supplies

Site Address

6A Kelly Court,
Springvale, VIC 3171

Postal Address

6A Kelly Court,
Springvale, VIC 3171

Contact Details

P: 03 9791 7500
E: sale@cpfs.net.au

