

MTA20

Rain/Mains Changeover Systems
MaxiSAVE Top of tank assembly



Application

The MaxiSAVE Valve is a fully automatic mechanical rainwater/mains changeover device designed for submersible pressure pump system for harvesting rainwater for the toilet, laundry and household applications with automatic mains water backup.

Features

- Easy & Tidy Install for Submersible Pump Systems
- Hydraulically Operated
- Patent design
- Easy to install
- Watermark Approved
- 2 year warranty
- Solid brass construction
- Fully waterproof – Built to last
- Built-in certified dual check valve for backflow prevention
- Watermark Approved right angle ball valves

Specifications

- Max Mains Pressure: 500 KPa recommended
- Max Pump Pressure: 600 KPa
- Min Pump Pressure: 300 KPa Recommended
- Max Flow Rate: 50 LPM
- Max water temperature: 40°C
- Min Water Temperature: 0°C
- Pump Inlet: 25mm 1" BSP F
- Mains Water Inlet: 20mm 3/4" BSP
- Outlet: 20mm 3/4" BSP


MaxiSAVE



Model Range

Model	Description
MTA20	MaxiSAVE 20mm Rain/Mains Changeover Valve top of tank assembly with cover • Hole size required – 290mm
HSM6-40A	MaxiSAVE MTA20 Rain/Mains tank assembly with Hyjet HSM6-40A Multistage Submersible Pump • kW: 1 • Max Flow: 93.2 L/min • Max Head: 42m • Single & double storey home: 4-6 outlets

Installation Guide

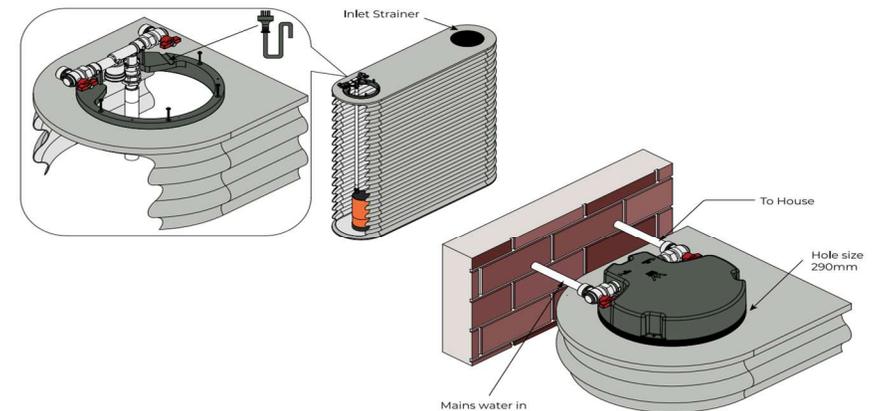

MaxiSAVE



Commercial Plumbing & Fire Supplies

Site Address

6A Kelly Court,
Springvale, VIC 3171

Postal Address

6A Kelly Court,
Springvale, VIC 3171

Contact Details

P: 03 9791 7500
E: sale@cpfs.net.au

